




MASON INDUSTRIES, Inc.
Manufacturers of Vibration Control Products
 350 Rabro Drive
 Hauppauge, NY 11788
 631/348-0282 FAX 631/348-0279
 Info@Mason-Ind.com
 Info@MasonIndustries.com.ar

CERTIFICADO POR
NOMBRE :
CLIENTE :
ORDEN :
MASON M.I. :
DWG. NO. :

MODELO
HD
 Double Deflection
 Neoprene Hangers

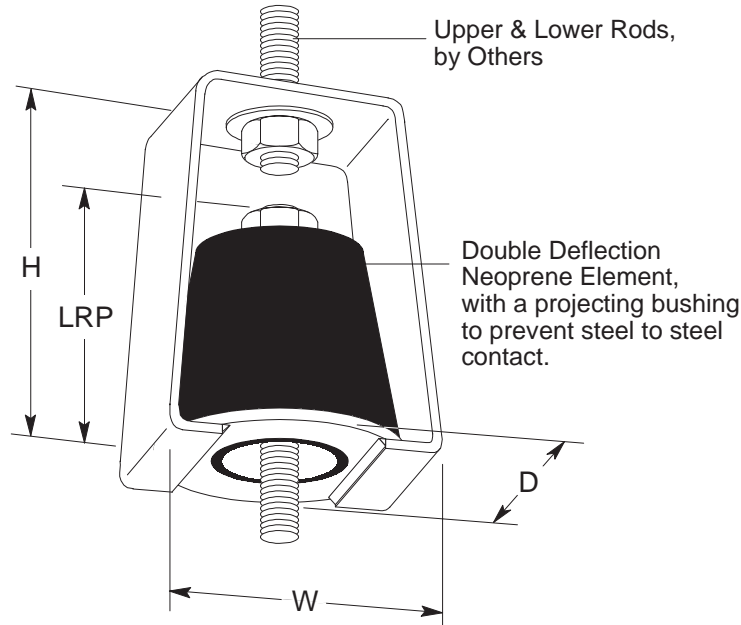

MODELO HD RATINGS

Size (Color Mark)	Durometer	Rated Capacity Range [kg]	Max. Rated Deflection [mm]
HD-Green	40	Up to 16	5
HD-White	60	16 - 34	5
HD-A-Black	30	Up to 20	9
HD-A-Green	40	14 - 34	9
HD-A-Red	50	27 - 57	9
HD-B-Red	50	Up to 107	10
HD-B-White	60	82 - 173	10
HD-B-Yellow	70	146 - 295	10
HD-BS-Blue	70	227 - 455	10
HD-CS-Blue	70	455 - 955	10
HD-DS-Blue	70	955 - 1909	10

Hanger elements have straight line deflection curves.

LRP - Lower Rod Penetration
 MRD - Maximum Rod Diameter

TYPE HD DIMENSIONS (mm)

Size	D	H	W	LRP	MRD
HD	45	57	48	32	10
HD-A	50	70	57	57	13
HD-B	83	114	108	76	19
HD-BS	83	114	108	76	19
HD-CS	83	127	108	83	22
HD-DS	100	159	121	83	22

CERTIFICATION DATA

TAG : _____
 UNIT : _____

PLAN VIEW OF HANGER LOCATION :



_____ mm DEFLEXION ESPECIFICADA

1 :	6 :
2 :	7 :
3 :	8 :
4 :	9 :
5 :	10 :
Material for One Set :	
Sets Required	

DWN : _____ CHKD: _____ DATE : _____

DWG NO. : _____